

*Work saver.*

*Designed.  
Engineered.  
Remarkable  
Value.*



## SmoothCut PTO Powered Stump Grinders

Economical and Efficient PTO powered stump grinder, makes stump removal fast and easy. Operator easily controls the stump grinder from the comfort of the tractor seat.



# Worksaver

## SmoothCut Stump Grinders

- Maneuverable - goes anywhere a tractor can; gets into tight places.
- Higher productivity via it's unique cutting wheel design.

### SmoothCut Specifications

	Model SG-26	Model SG-36
Hitch	Cat. I	Cat. I/II
Overall length (est.)	75-inches	80-inches
PTO driveline type	Series 5	Series 6
PTO speed	----- 540 rpm-----	
Driveline protection	----- Slip Clutch -----	
Gearbox rating / ratio	60 hp / 1:1.5	100 hp / 1:1.46
Cutting wheel construction	-- Welded 2-piece laminated steel --	
Cutting wheel thickness	----- 3/4inch -----	
Cutting wheel diameter	26-inches	36-inches
Cutting wheel speed (approx.)	801 rpm 5,515 ft./min	788 rpm 7430 ft./min
Number of teeth	30	39
Cutting teeth construction	----- Carbide steel bolt in -----	
Cutting height above ground	18-inches	18-inches
Cutting depth below ground	10-inches	10-inches
Max. cut depth per pass	5-inches	8-inches
Maximum horizontal cut	28-inches	33-inches
Swing arc	45-degrees	45-degrees
Minimum HP requirement	22-PTO hp	45-PTO hp
Maximum HP	50-PTO hp	100-PTO hp
Weight (est.)	660-lbs.	880-lbs.
Computer product number	811500	811550

- Cutting wheel design provides a smoother cutting action.
- Easy to operate - hydraulic controls allow easy operation from the tractor seat using existing tractor hydraulic controls.
- Durable carbide-tipped cutting teeth are economical and easy to replace.
- Harden bushings used in major pivot points for increased reliability.
- Grease zerks provided at major pivot points for extended service life.
- Standard needle valve for precise control of cutting feed rate for best cutting action.
- SureFoot stabilizer bar provides solid footing during operation.
- Rubber deflector helps controls chips and debris during grinding.
- Parking stand for easy storage.

*\*Be sure front of tractor is properly counterbalanced with front-end weights or front-end loader.*

**▲ READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE OPERATION.**

**▲ STUMP GRINDER WILL PUT A HEAVY LOAD ON THE REAR OF YOUR TRACTOR. BE SURE FRONT OF TRACTOR IS PROPERLY COUNTERBALANCED WITH WEIGHTS.**

**▲ NEVER ALLOW CHILDREN OR BYSTANDERS AROUND TRACTOR OR STUMP GRINDER WHEN YOU ARE USING EQUIPMENT.**

Worksaver Inc. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. Worksaver Inc. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



**Worksaver, Inc.**

P.O. Box 100, Litchfield, IL 62056-0100  
 Phone: 217-324-5973 • Fax: 217-324-3356  
 E-mail: [sales@worksaver.com](mailto:sales@worksaver.com)  
 Web: [www.worksaver.com](http://www.worksaver.com)

**Information Provided By:**



**Worksaver.**


*Designed.  
Engineered.  
Remarkable  
Value.*



**Worksaver®**

## **TC-8 Tree Clipper For Tractor Front Loaders & Skid Steers**

**Solve the problem of trimming hard to reach tree branches and unwanted trees. Ideal for high reach trimming or ground level cutting.**

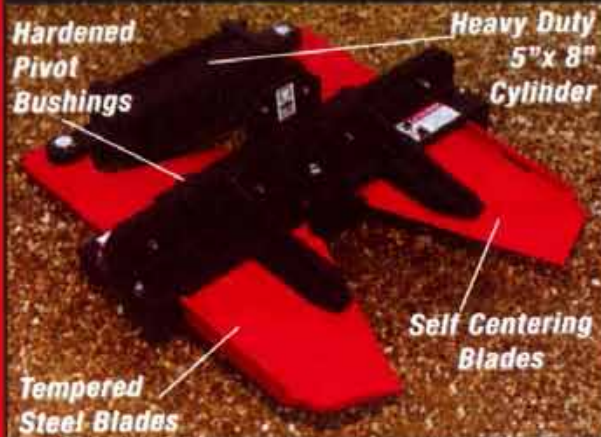

# Worksaver Models TC8-FL, TC8-SS

- Solve the problem of trimming hard to reach tree branches or unwanted trees.
- Mounts to either side of the main frame for excellent visibility.
- Tree Clipper eliminates the unsafe practice of trimming limbs with a chain saw from a loader bucket or ladder.
- Timesaving way to trim and clear trees and brush, that is faster and easier than using a chainsaw.
- When cutting at ground level, unit will cut flush with ground.
- Heavy-duty 5" x 8" hydraulic cylinder with 2" rod and 1-1/4" pins for positive cutting action.
- Hardened pivot bushings for long service life.
- Self-centering 3/4" T-1 steel blades provides outstanding performance.
- Unit features power tilt to rotate head assembly for best cutting angle.
- Extended reach allows trimming of limbs 12-16 ft. high (depending on tractor / loader used). When cutting trees at ground level, allows easy access under extending branches.
- Design allows unit to cut overhead ....or horizontally at ground level.
- Cuts limbs and trees up to 8" in diameter.
- Minimum hydraulic pressure required – 2000 psi.
- Available for tractor loaders (optional quick attach brackets available) and skid steer loaders.
- Standard electric solenoid valve and hose kit to fit most skid steer loaders. Allowing use of single set of remotes to control both functions.

## MODELS TC8-FL, TC8-SS SPECIFICATIONS

Frame Construction .....	Welded Steel
Clipper Blade Material .....	T-1 Steel
Clipper Capacity (tree size) .....	8" Diameter
Main Pivot Tube .....	2-7/8" O.D. – 3/8" wall
Length of Reach (from main frame) .....	72 inches
Head Rotator Cylinder Size .....	2-1/2" x 10"
Cutting Head Cylinder Size .....	5" x 8"
Degree of Cutting Head Rotation .....	113 degrees
Mounting for Tractor Loader (TC8-FL) .....	Std. Pin Type*
Mounting for Skid Steers (TC8-SS) .....	"Universal" Skid Steer
Minimum Hydraulic Pressure .....	2000 psi
Tractor size requirement (min. PTO HP) .....	45 PTO HP**
Product Computer Number TC8-FL .....	811300
Weight TC8-FL (lb/kg) .....	710 / 322
Product Computer Number TC8-SS .....	811305
Weight TC8-SS (lb / kg) .....	723 / 328

\*Optional Front Loader Quick Attach brackets are available

\*\*Be sure rear of tractor is properly counterbalanced.

Base unit does not include Hydraulic Hoses.



**READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE OPERATION.**

Worksaver Inc. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. Worksaver Inc. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



**Worksaver, Inc.**

P.O. Box 100, Litchfield, IL 62056-0100  
Phone: 217-324-5973 • Fax: 217-324-3356  
E-mail: [sales@worksaver.com](mailto:sales@worksaver.com)  
Web: [www.worksaver.com](http://www.worksaver.com)

WS-TC001-LS (1/04)

**Information Provided By:**

