


**Trim up close.**  
**Throw the clippings out back.**

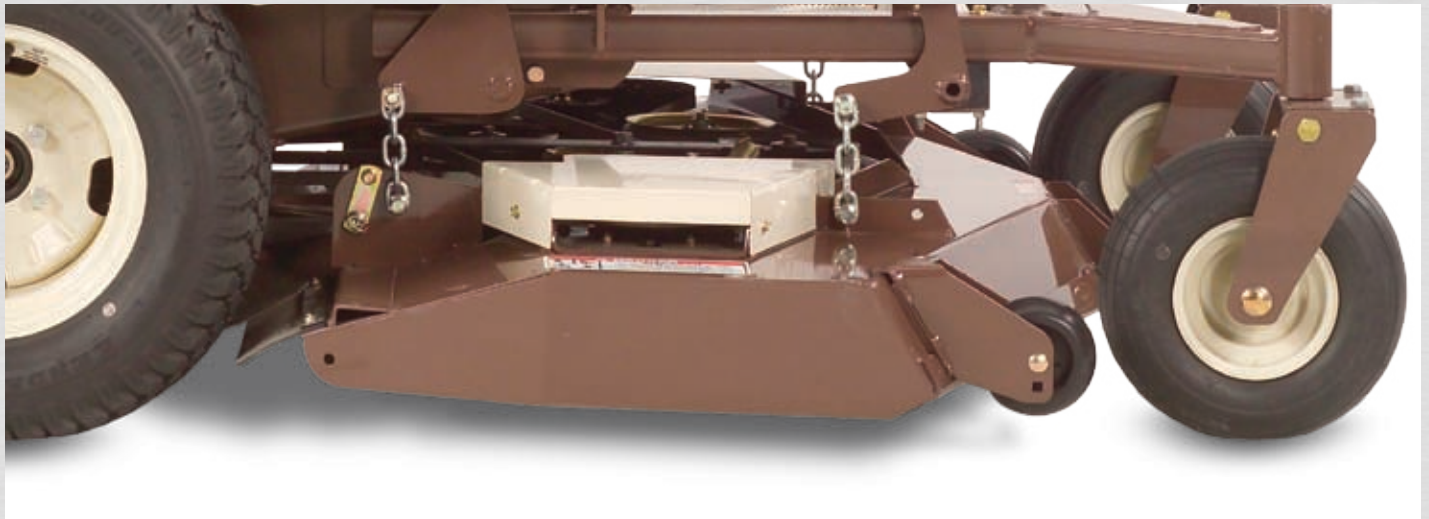

**DuraMax® 4X Rear Discharge™ decks for MidMount™ models leave a manicured cut.**

Designed to advance the safety and production solutions provided by rear discharge with the best possible cut, the Grasshopper 4X dedicated rear discharge deck offers revolutionary performance, distributing clippings evenly to avoid clumping and lowering operating costs. Perfect for professional contractors, municipalities and schools, the 4X RD deck's unique four-spindle design evenly distributes clippings, eliminates windrowing and channels material out the back for cleaner operation. In cemeteries, the 4X RD deck allows trimming around headstones on either side of the deck, while discharging away from the stones themselves.

- Specially designed cutting chamber handles large volumes of grass while delivering a clean, level cut.
- Four-spindle design spreads the load of grass clippings and debris while channeling it out the back of the deck.
- Trim on either side of the deck to reduce hand trimming and eliminate backpack blowing after mowing.
- Anvil-edged deck with 1/2-inch-thick formed steel leading edge features 7-gauge skirts and geometrically engineered design for superior impact protection that will withstand the punishments of commercial mowing.



Knock down the tall stuff and throw the clippings out back.

**DuraMax® 4X Rear Discharge™ Deck Specifications**

<b>WIDTH OF CUT</b>	52 in. (132.1 cm)	61 in. (154.9 cm)	72 in. (182.9 cm)
<b>MIDMOUNT™ COMPATIBILITY</b>	223, 227, 321D, 329B	223, 227, 325D, 329, 329B, 335, 430D, 432	227, 325D, 329, 335, 430D
<b>DECK WIDTH</b>	53.5 in. (135.9 cm)	62.5 in. (158.8 cm)	73.5 in. (186.7 cm)
<b>CUTTING HEIGHT CONSTRUCTION</b> (Robotically welded steel)	1.0 to 5.0 in. (2.5 cm to 12.7 cm)		
<b>CUTTING BLADES</b> (Tempered, alloy steel)	Formed, double thickness steel (0.269 in. > heavier than 3-gauge) truss spindle plane and Sentry™ spindles with 8-in. spindle flanges and 6-bolt pattern on a triple-strength upper deck, more than .50 in. thick in stress zones for superior strength.		
<b>SENTRY™ SPINDLE ASSEMBLIES</b>	(3) 18 in. (45.7 cm)	(3) 21 in. (53.3 cm)	(3) 25 in. (63.5 cm)
<b>SPINDLE HOUSING</b>	2.5 cm (approx. 1 in.) O.D. shaft. Double bearings, greasable from top of deck. Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.		Cast iron
<b>BLADE DRIVE</b>	Machined aluminum Belt drive with single Kevlar V-belt and idler arm tensioning.		

# Build on the productivity and economy of a 4X RD Deck with a range of options.

## MaxTorque™ Diesel

---

Clean-running MaxTorque™ diesel units are Tier 4I-compliant and B5-ready, delivering reserve torque you can feel for superior performance in tough mowing conditions.

The direct-port, fuel-injected diesel engines are fuel efficient, saving you up to 700 gallons of fuel over 1,000 hours of use (compared to similar-sized gasoline engines) – and powerful enough to handle the toughest jobs.

## DuraGuard™ Bumper

---

Optional dual-rail, high-strength tubular steel DuraGuard™ protects rear of mower in close-quarters mowing and allows easy access to – and removal of – Access-Eze™ service shield.

## Edge-EZE™ Edger

---

Add an Edge-EZE™ edger and increase fuel and labor savings even more. The Edge-EZE™ can be mounted on either side of the 4X RD deck, eliminating the need for hand-held, two-cycle edgers. Edge-EZE™ maintains clean, sharp edges along sidewalks, roadways and driveways, eliminating time-consuming hand edging and reducing edging time up to 75%.

## DuraFlex™ Suspension Forks, Flat-Proof Tires

---

Optional DuraFlex™ Suspension Forks absorb the jolts and jostles of irregular ground to maintain the level cut you want. Optional semi-pneumatic front tires will never go flat.




Shown with optional aluminum sunshade canopy.



## Premier Suspension Seat

---

Optional premier suspension seat provides maximum comfort for operators of all sizes with adjustable lumbar support, backrest, armrests and weight-calibrated suspension control.



All specifications and information contained herein are subject to change without notice. Access-Eze, DuraFlex, DuraGuard, Edge-EZE, MaxTorque, MidMount, 4X Rear Discharge, Sentry and True ZeroTurn are trademarks and Grasshopper, the Grasshopper logo, DuraMax and Your Next Mower are registered trademarks of the Grasshopper Company. All other products are trademarks or registered trademarks of their respective holders.



**YOUR NEXT MOWER®**

[grasshoppermower.com](http://grasshoppermower.com)

The Grasshopper Company • One Grasshopper Trail  
P.O. Box 637 • Moundridge, KS 67107 U.S.A.  
Telephone: 620-345-8621 • FAX: 620-345-2301