


KINGHITTER

THE HEAVYWEIGHT IN POSTDRIVERS

**The Undisputed
Heavyweight in
Postdrivers**

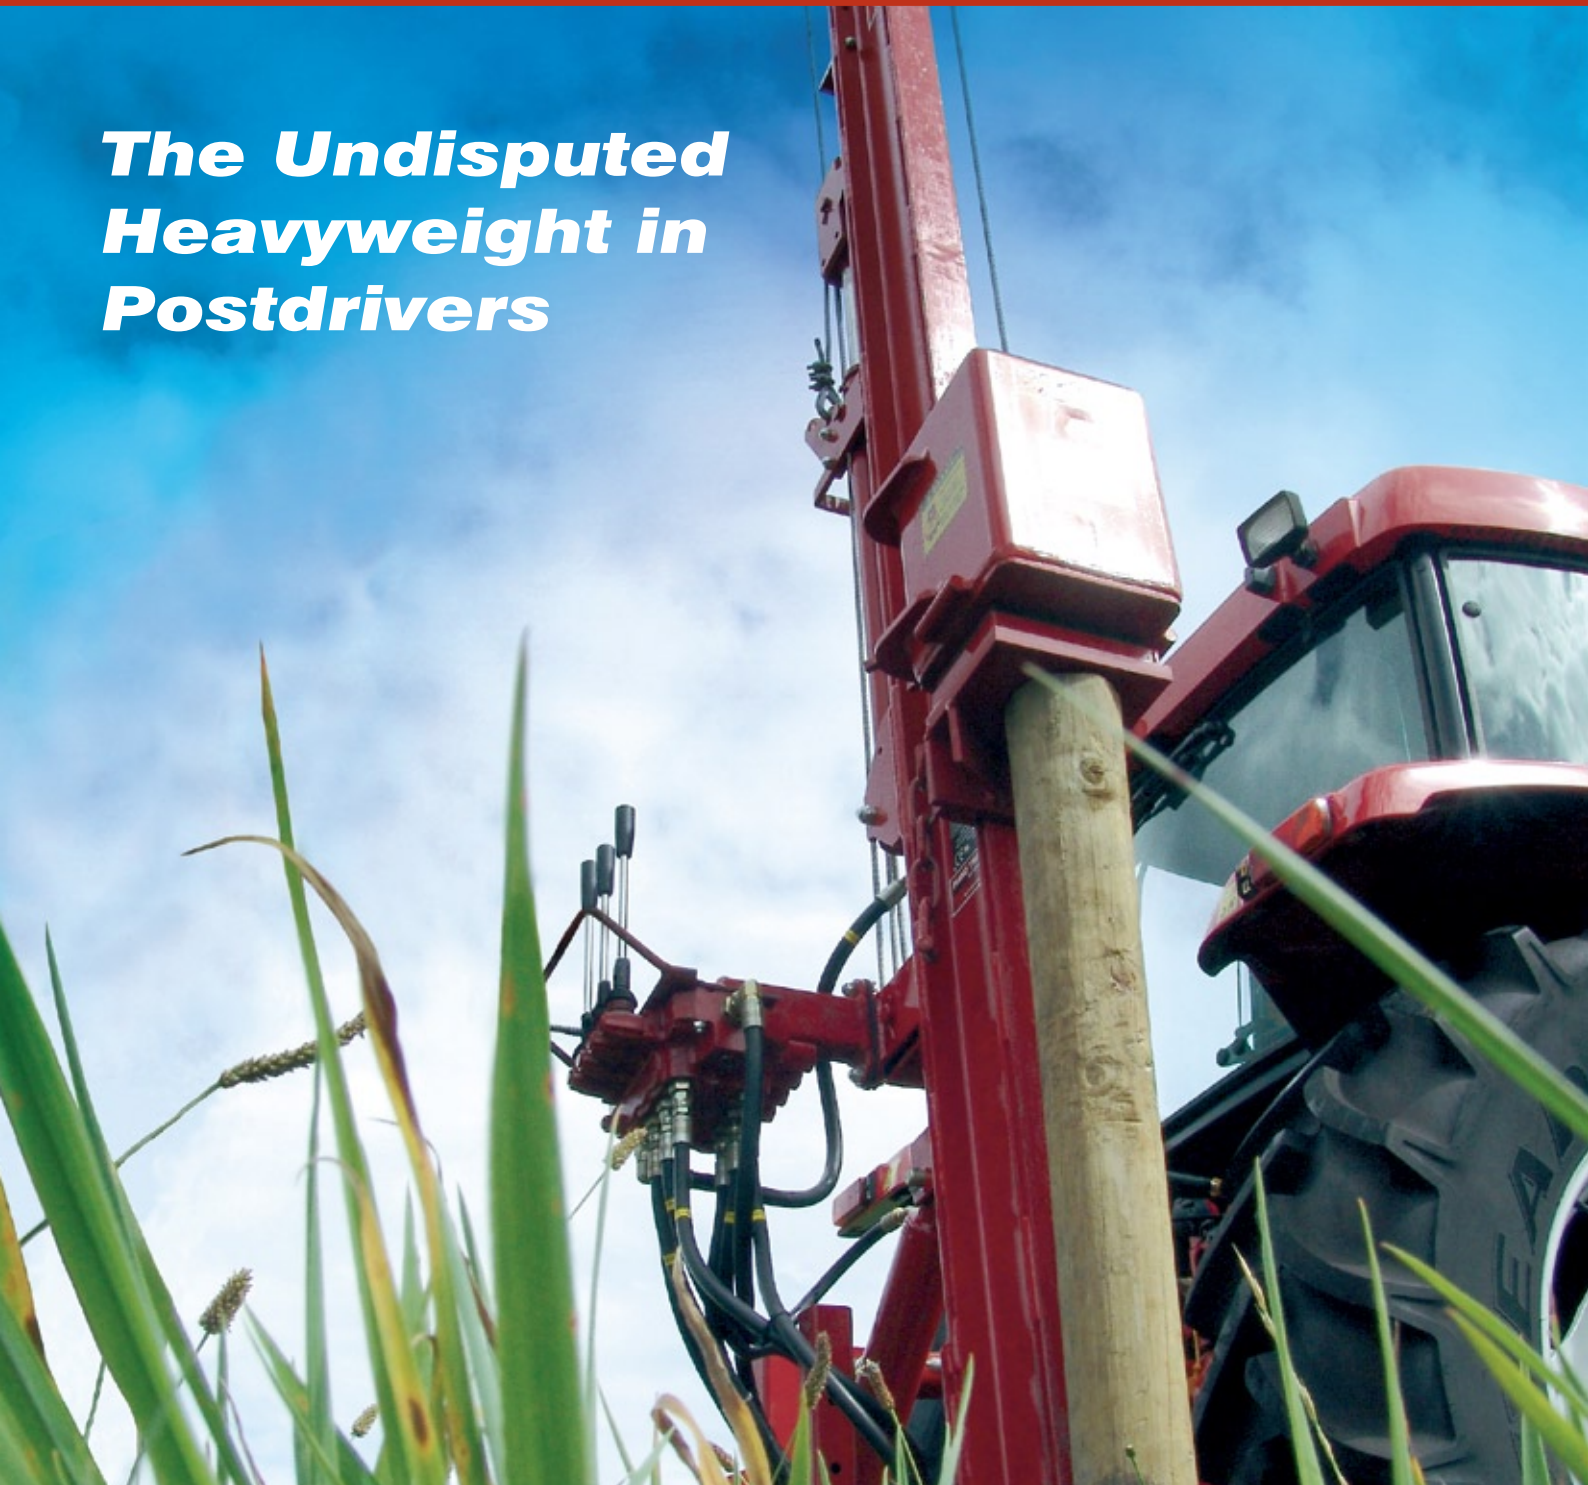

Series I, II and III Kinghitter Postdrivers & Accessories



Series



**Floats Like
a Butterfly,
Stings Like
a Bee**

**“The postdriver
that is easy and
simple to operate
but does a
perfect job for
the lifestyler.”**

Bruce Watt
Lifestyle Farmer, AUCKLAND, NZ

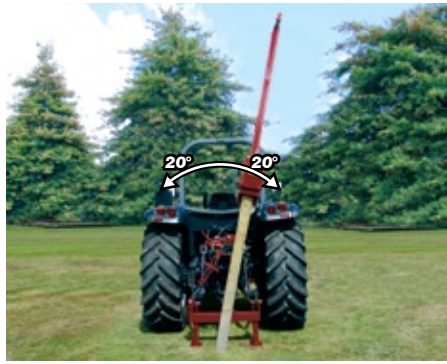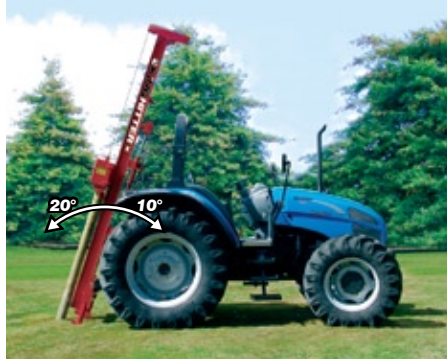

Kinghitter Rancher Series 1 - 3.8MTR

- Standard 3 bank hydraulic valve
- 3 Point Linkage - Rear Mounted
- Single Flange Beam
- Tailor-made for economical Fencing & General Farm Work
- Ideal for Farmers & Ranchers
- Mounts to Tractors, Skid Steer Loaders and Barges/Pontoons
- Drives up to 200mm dia. Posts
- Standard 205kg Weight
- Freestanding in most conditions
- Standard Post Cap

KINGHITTER THE HEAVYWEIGHT IN POSTDRIVERS

- Standard Safety Bracket Main Pivot Pin
- Standard Safety Hammer Lock

Series 1 Optional Extras

- Safety Guard
- Hydraulic Top Link
- Hydraulic Angle Adjustment
- Side Mount Frame
- Top Link Extension Bracket
- T Post Holder and 7.3cm Oil Pipe Holder

(No Rock Spike or Pilot Auger available for this model)

Series

III

**Packs the
Professional
Punch**



**“The Kinghitter is
a true workhorse.
The postdriver that
can be relied upon
in all conditions
and situations.”**

Dave Currie
Fencing Contractor, FEILDING, NZ

Kinghitter Series 2 - 3.8MTR

Kinghitter Series 2 - 4.25MTR Optional Hinged Mast

Kinghitter Series 2 - 4.88MTR Optional Hinged Mast

- 3 Point Linkage - Rear Mounted
- Weights from 205kg - 272kg
- The World's Finest Post Driver with Double Thickness Steel on the Main Beam
- Ideal for Farmers, Ranchers, Contractors, Vineyards, Freeway Construction
- Mounts to Tractors, Skid Steer Loaders, Excavators and Barges / Pontoons.
- Drives up to 300mm dia. Posts
- Standard Safety Bracket Main Pivot Pin

KINGHITTER

THE HEAVYWEIGHT IN POSTDRIVERS

- Standard Safety Hammer Lock
- Freestanding in most conditions
- Standard Heavy Duty Post Cap

Series 2 Optional Extras

- Safety Guard
- Pilot Auger Kit
- Rock Spike Extractor
- Rock Spike Combo Auger Unit
- T Post holder & 7.3cm Oil Pipe Holder
- Hinge Beam Standard on Australian 4.25MTR & 4.88MTR Models
- Top Link Extension Bracket - Hydraulic Side Shift
- Super Pro Base Attachment - 900mm side shift
- Super Side Shift (182mm Side Shift)

Series

III

**The
Heavyweight
Not for the
Light-Hearted**

“A Post Driver that is built for a fencing contractor. It can be used anywhere, and has an excellent range of usable accessories, especially the Rock Spike Extractor.”

Andrew Fleury
Fencing Contractor, TAIHAPE, NZ



Kinghitter Series 3 - 3.8MTR

Kinghitter Series 3 - 4.25MTR Optional Hinged Mast

Kinghitter Series 3 - 4.88MTR Optional Hinged Mast

- 3 Point Linkage - Side Mounted
- Proven World Over
- The World's Finest Post Driver with Double Thickness Steel on the Main Beam
- Standard 450mm Hydraulic Side Shift
- Ideal for Contractors, Vineyards, Freeway Construction, Ranchers, Farmers
- Mounts to Tractors - Drives up to 300mm dia. Posts
- Drives up to 4,000 Posts a week
- Standard Heavy Duty Post Cap

KINGHITTER THE HEAVYWEIGHT IN POSTDRIVERS

- Hinge Beam Standard on Australian 4.25MTR & 4.88MTR Models
- Standard Safety Hammer Lock

Series 3 Optional Extras

- Safety Guard
- Pilot Auger Kit
- Rock Spike Extractor
- Rock Spike Extractor Post Cap
- Rock Spike Combo
- T Post Holder and 7.3cm Oil Pipe Holder
- Weights from 205kg - 272kg
- Orchard Base Option - 1755 Closed Width

KINGHITTER

THE HEAVYWEIGHT IN POSTDRIVERS

**30 Years of
Dedicated Research
& Development have
produced the Worlds
Best Post Driver**

Fairbrother Industries, working in close conjunction with contractors and farmers world wide, have revolutionised Post driving technology. Fairbrother Industries have a broad range of accessories available. The Fairbrother Kinghitter Series 2 & 3 Rock Spike has enough raw power to drive through 450mm of frozen ground, 150mm of solid concrete, broken rock and even some types of shelf rock. The Pilot Auger or Combo unit will easily drill pilot holes in Limestone, Sandstone, Ironsand and solid heavy clay.

KINGHITTER

THE HEAVYWEIGHT IN POSTDRIVERS

ACCESSORIES



Hinged Mast

Eliminates time wastage when confronted with height restrictions & assists with storage. Optional on 4.25MTR & 4.88MTR Beams. Standard on Australian 4.25MTR & 4.88MTR. Series 2 & Series 3 Models.



Rock Spike Extractor

Inset: Rock Spike Safety Cap
Drives 65mm - 90mm - 130mm
High Tensile Steel Spike.
Punches through Rocks,
concrete, frozen ground prior
to posting.



Safety Post Cap

The unique holding system
that makes hands free post
driving super safe.


Pilot Auger

205kg - 250kg Down Pressure
50mm - 250mm Auger Capacity



Rock Spike Extractor Working Position


8.13 Tonne Extraction Lift to
remove driven spike for
ground, leaving Pilot Hole.



Super Pro Base Attachment

900mm side shift

- Spade Holder
- Jenny Bracket
- Gear Bucket



Rock Spike Combination Unit

Assists with downward
pressure when drilling through
Limestone, Sandstone,
Ironsand and solid heavy clay.
50mm - 250mm holes.




T-Post, Oil Pipe, Warratah & Road Marker Post Holder

Prevents light posts from
buckling under impact.



Rock Spike Combo. Unit Working Position

6 Tonne Down Pressure
Tungsten tip 50mm -
250mm Augers.



Safety Guard

Inset: Folded Back

Supplied as an optional extra
to comply with local bylaws.

*Standard on all Australian
Models.

KINGHITTER

THE HEAVYWEIGHT IN POSTDRIVERS

Specifications	Series I	Series II	Series III
MOUNTING	Category II	Category II	Category II
MAST LENGTHS	3.8m	3.8m - 4.25m - 4.88m	3.8m - 4.25m - 4.88m
HAMMERS	205kg	205kg to 272kg	205kg to 272kg
IMPACT AT FULL STROKE	27,180kg	3.80m - 36,240kg 4.88m - 54,368kg	3.80m - 36,240kg 4.88m - 54,368kg
TILT FRONT / BACK	10° / 20°	10° / 20°	30° / 30°
TILT SIDE / SIDE	20° / 20°	20° / 20°	25° / 45°
LEGS	Fixed	Adjustable	Adjustable
TOP LINK	N/A	Hydraulic	Hydraulic
ANGLE ADJUSTMENT	Manual	Hydraulic	Hydraulic
SIDE SHIFT	N/A	Optional	450mm - Hydraulic
SAFETY POST CAP	Standard	Standard	Standard
SAFETY GUARD	Optional - Std Aust	Optional - Std Aust	Optional - Std Aust
SAFETY HAMMER LOCK	N/A	Standard	Standard
MAX. POST HEIGHT	2.7m	3.80m - 2.70m 4.25m - 3.30m 4.88m - 3.60m	3.80m - 2.70m 4.25m - 3.30m 4.88m - 3.60m
MIN. HYDRAULIC PSI	1800 PSI	1800 PSI	1800 PSI
VOLUME OIL / MIN.AV	6 GPM	10 GPM	10 GPM
STORAGE HEIGHT (Hinged)	3.8m - NOT HINGED	3.80m - 3.00m 4.25m - 3.10m 4.88m - 3.20m	3.80m - 3.00m 4.25m - 3.10m 4.88m - 3.20m
SHIPPING WEIGHT (Std Machines Guide Only)	440kg	3.80m - 637kg 4.25m - 665kg 4.88m - 742kg	3.80m - 1055kg 4.25m - 1095kg 4.88m - 1160kg
SHIPPING VOLUME	From 1.8 cu. m	From 2.8 cu.m	From 3 cu.m



Fairbrother Industries - Committed to Safety 1st

- Study the Operators Manual, Watch the Assembly & Safety Video, and follow the instructions on the Safety Decals
- Offset controls let the operator stand safely to the side of the driver
- Post Cap guides the post correctly & protects the operator from impact
- Never stand in front of the driver, always stand to one side of the post being driven
- Use the correct Post Cap or T Post holder to hold the post.
- Change the valve to suit open or closed centre hydraulics
- Make sure all legs are positioned firmly on the ground
- Always check for underground obstacles (wires, pipes etc...)
- Never use the maximum force of the driver until you are sure the post is being driven straight
- Keep hands away from the top of the post at all times.
- Use the right horse power tractor unit to suit the driver.
- Do not operate the post driver for other uses.
- Use caution when driving small diameter wood and steel posts.
- Wear appropriate Safety Equipment (Ear Muffs, Safety Glasses, and Hard Hat).
- Consider the operating environment (steep slopes can cause roll overs).

DISTRIBUTED BY

FAIRBROTHER
INDUSTRIES LIMITED

9 Bay Park Place, Beachhaven, 0626 Auckland, New Zealand

Phone: +64 9 482 0866, Fax: +64 9 482 0877

Email: sales@fairbrother.co.nz Web: www.kinghitter.com