

Since 1910

1-Year Warranty

DANUSER INDUSTRIAL GROUP

www.danuser.com

AUGER BUCKET

Eliminates backbreaking labor from mixing, transporting, and dispensing

Concrete (up to 1" slump)

Sand

Washed Gravel (3/4" max.)

Wildlife Feed

Asphalt



Agricultural Grains



- ◆ Reach difficult areas for footings, slabs, sidewalks, fence posts, sign posts, deck posts, piers, etc.
- ◆ Fill sand bags.
- ◆ Prepare base for patios and sidewalks.
- ◆ Repair asphalt pavement.
- ◆ Dispense corn and other wildlife feed.
- ◆ Dispense grains for feed and barn lots.

Add a proven Danuser attachment to your fleet!

Specifications

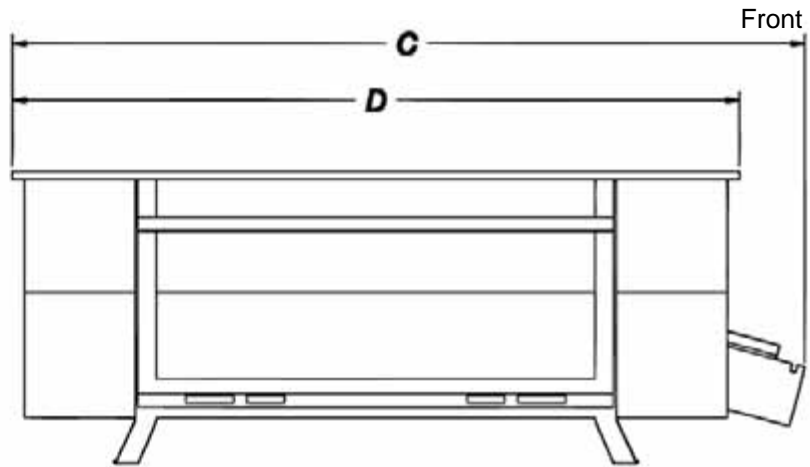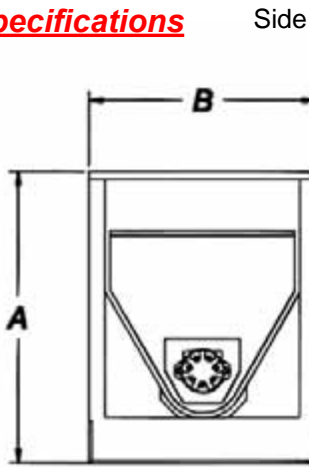

Overall Height	(A)	27"
Overall Width	(B)	21-1/2"
Overall Length	(C)	74-1/2"
Overall Bucket Length	(D)	68-1/2"
Weight		380 lbs.
Hydraulic Requirements		12 GPM 2000 PSI
Auger Length		61-1/2"
Auger Diameter without Rubber		4"
Auger Diameter with Rubber		6-1/2"
Auger Flighting Spacing		4"

Features

- ◆ 1/2 yard capacity is 22 bags (80 lbs. ea.) of premix concrete. 3/4 yard capacity capable with optional hopper extension.
- ◆ Accurate and controlled discharge - 1/2 yard in 50 seconds
- ◆ Horizontal steel auger with Eaton hydraulic motor drive
- ◆ Replaceable protective rubber flighting prevents binding of coarse material.
- ◆ Universal skid-steer attachment
- ◆ Quick attach frame on either side allows right- or left-hand discharge.
- ◆ Self loading from loose piles
- ◆ Excellent operator visibility
- ◆ One-person operation
- ◆ Can be ordered as a concrete mixer
- ◆ 7' hose kit with flat face couplers included.
- ◆ Two multi-linked chutes (24" & 36" long) included.

Since 1910

DANUSER
INDUSTRIAL GROUP

500 E. Third Street
P.O. Box 368
Fulton, MO 65251

TEL: (573) 642-2246
FAX: (573) 642-2240
E-MAIL: sales@danuser.com

Danuser reserves the right to make changes in design, specifications, and prices without notice and without incurring any obligation relating to such changes.

Form No. 3151